

How to update to MirrorLink® 1.1 on CITROËN C1



1 | INSTALLATION TIME

At least 6 minutes is needed to upgrade MirrorLink 1.1 your 7" Touch screen.

The update must be done while engine turned on.

2 | STEPS REQUIRED BEFORE INSTALLING THE NEW VERSION OF CITROËN C1

1. Prepare the following::

- USB key with a minimum memory of 512MB
- computer or laptop equipped with a USB port (a customer with a tablet or smartphone can not do the update)
- Internet connection

2. Preparation of USB?

Download the software file from MyCitroën:



TELECHARGER LA MISE A JOUR TELEPHONES COMPATIBLES FONCTIONNEMENT

MIRROR SCREEN

PROCEDURE DE MISE A JOUR

Votre Nouvelle CITROËN C1 est équipée avec la fonction Mirror Screen, qui vous permet de profiter smartphone compatible sur le Tableau tactile 7".

Aujourd'hui, cette fonction s'enrichit de nouveaux smartphones Android sont désormais compatibles avec votre Tableau tactile 7" ce dernier peut maintenant répliquer de nouvelles applications compatibles. Une fois votre trajet terminé, vous pouvez les utiliser directement sur votre smartphone.

Profitez-en dès aujourd'hui en mettant à jour le logiciel de votre Tableau tactile 7" pour accéder de bénéficier de la version 1.1 du protocole MirrorLink®.

Il vous suffit de suivre la procédure simple décrite dans le document à télécharger ici.

*Selon la date de production de votre C1106, cette nouvelle version logicielle pourrait déjà avoir été installée lors de sa fabrication.


TELECHARGER LA PROCEDURE

TELECHARGER LA MISE A JOUR

Check and verify that the software file is the following:

⇒ 13TPDAEU-EA01_0001.kwi (218 Mo)

Copy the file to your USB key and go to your vehicle.

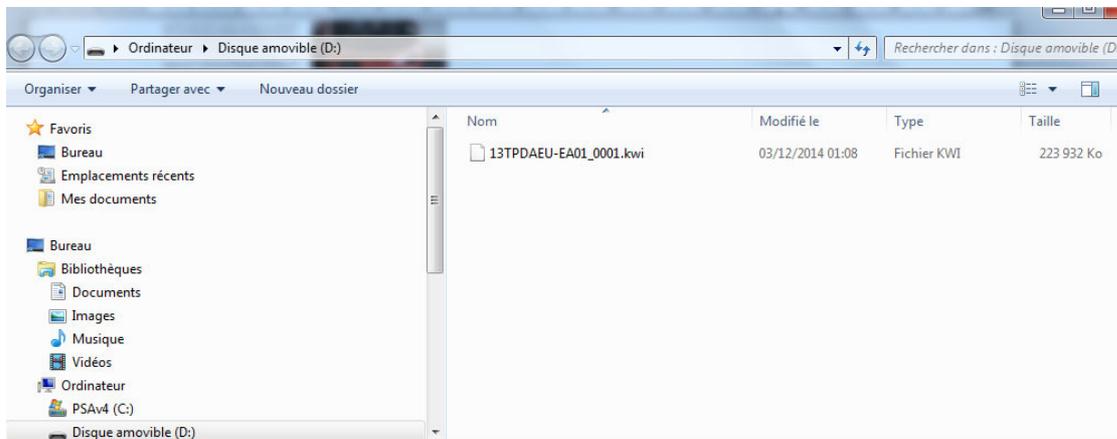

3 | UPDATE PROCÉDURE

Do not disconnect "USB flash drives" until Step 7.


Step 1. Turn on the engine.

Step 2. If "Menu Screen" is not be displayed, Press lower knob to "Menu Screen".



Step 3. Press "SETUP" to enter Setup Screen.





Step 4. Press "General".

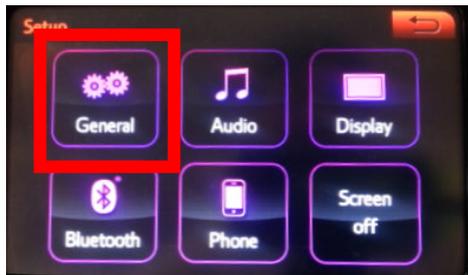


Step 5. Scroll down the page and then press "Software Update".

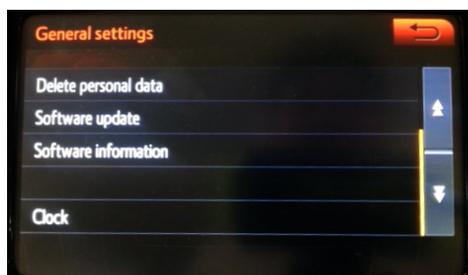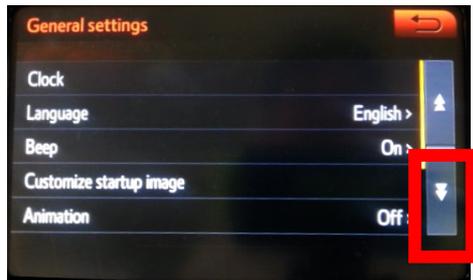

Step 6. Press "Update". If the software is already "0820", it is not necessary to run the update. Below you see the software 810 and hence an update is needed.

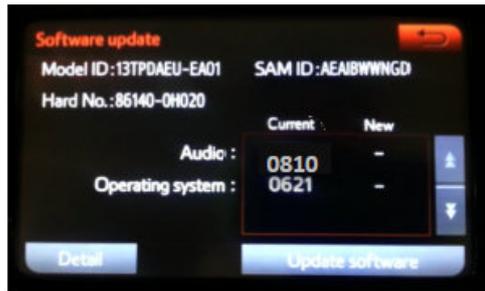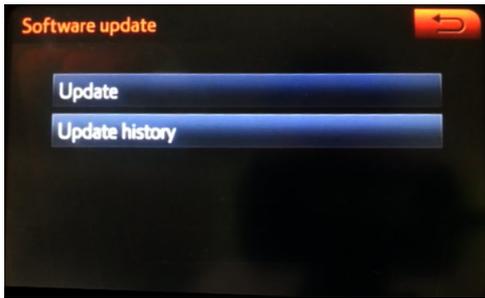


Step 7. Insert USB, and check the version.

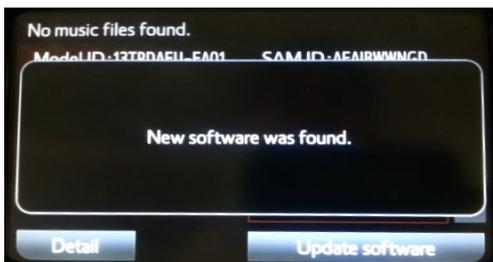


Remark

If software has been detected properly, a "New software was found." pop-up will be displayed.


Step 8. Press "Update Software".

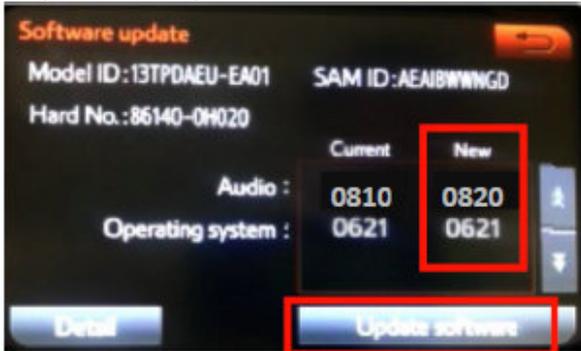

Step 9. Press "Yes".

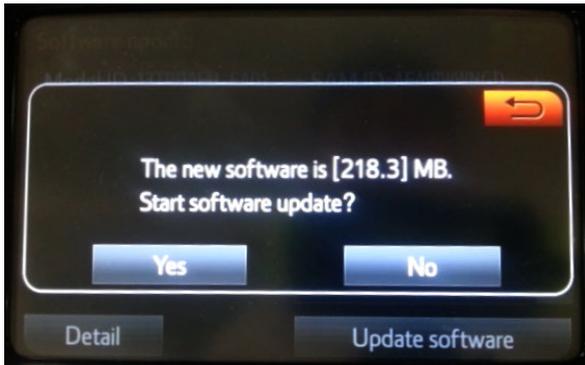


Step 10. Wait for update to finish.

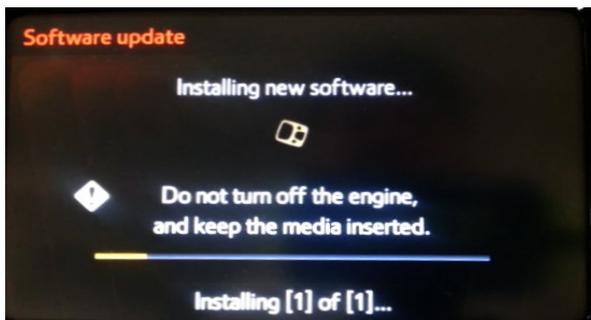

Do NOT turn off the engine before the software is ready for updating.
NOT pull the USB out of the vehicle USB port

Step 11. When update is finished, the Ready to update software screen will be shown.

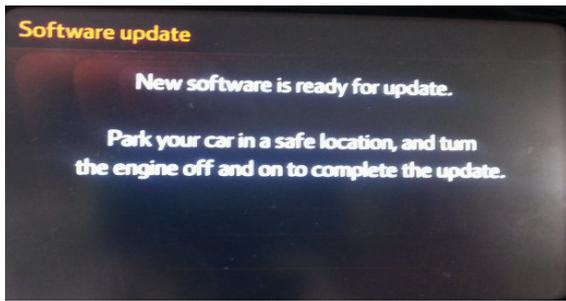

Step 12. Turn Acc OFF -> ON.

Step 13. Execute 1-6 of the procedures to make sure the update has been successful

Step 14. Confirm the version: The correct version is 0820.



The image shows a screen titled "Update history" with a table of update items. The table has columns for "Update item", "New", and "D/M/Y". The "New" column contains the version numbers "0621" and "0820". The "D/M/Y" column contains "--/--/----". The "Operating system" and "Audio" rows are highlighted with red boxes.

Update item	New	D/M/Y
Operating system	0621	--/--/----
Audio	0820	--/--/----